



# ALLSTRIP

Universal solvent with a high flash point for the removal of blocking glues and lacquers in an ultrasonic process or in beakers.



## WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning	Removal of blocking glues and lacquers

### COMPATIBILITY

- Stainless and tempered steel
- Aluminium
- Gold: white, pink, yellow
- Rhodium, palladium
- Copper alloys:
  - Brass
  - CuBe
  - Nickel silver

### COMPONENTS

- EACH compliant

### PHYSICOCHEMICAL DATA

- pH concentrated: n.m.
- Density: 0.99
- Flash point: 88°C (190°F)

### INSTRUCTIONS FOR USE\*

- Concentration: 100%
- Temperature: 20 to 50°C (68 to 122°F) (not exceed 70°C (158°F))
- Time: 2 to 10 minutes


\*Use in a space that is naturally ventilated or equipped with a fume extraction system.

### PROCESS EXAMPLES

- Removal of glues, waxes, lacquers, setters cement, in beakers



- Removal of contaminants in an ultrasonic process

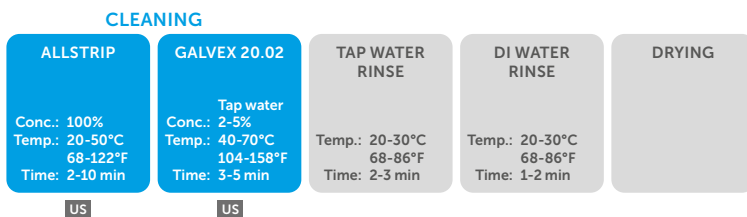

### ULTRASONIC CLEANING

Parameters for cleaning:

T° + % + Time + US

30/08/23

### STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

