



RODACLEAN 2018

Strong alkaline liquid for the removal of polishing paste residues and soluble oils in ultrasonic processes.



AEROSPACE & AUTOMOTIVE RANGE

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning	Soluble oils, polishing pastes, tumbling residues, etc.

COMPATIBILITY

- Super alloys :
 - Inconel, Waspalloy, A286
- Hard steels :
 - 52100 Chrome steel, cast iron
 - 15-5 PH, 17-4 PH
- Bearing steels :
 - D50, 440C, 316
- Ceramics
- Polymers
 - Nylon, PA, PEEK

COMPONENTS

- Strong alkali, surfactants, chelating agents
- No CMR compounds, phosphates, COV,
- REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 14
- Density: 1.33
- Surface tension: 33.9 mN/m



INSTRUCTIONS FOR USE*

- Concentration: 3 to 5%
- Temperature: 40 to 70°C (104 to 158°F)
- Time: 2 to 5 minutes

*Dependent on the quality of water and the nature and quantity of contaminant.

PROCESS EXAMPLE

- Removal of polishing compounds in ultrasonic process

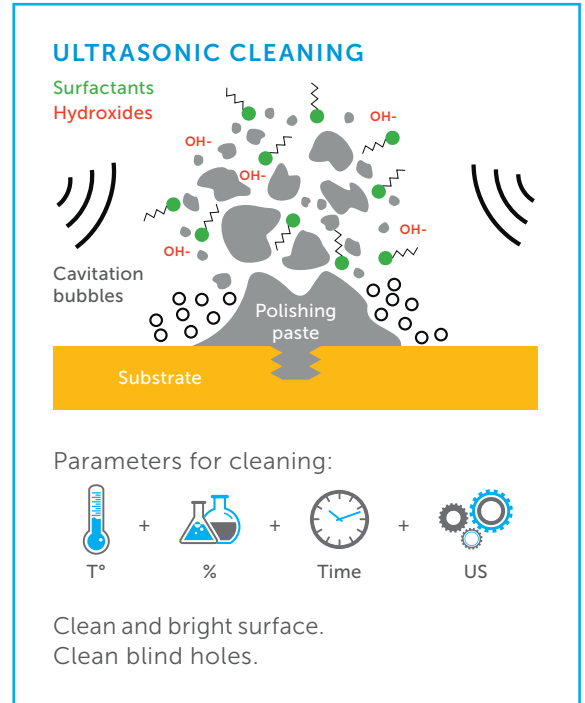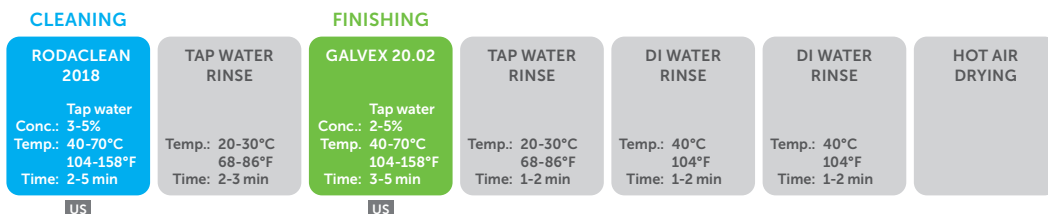

28/11/23

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

