



CUTTING TOOLS

CLEANING & DECOATING



ECOLOGICAL CLEANING SOLUTIONS

 SWISS QUALITY



CUTTING TOOLS RANGE: CLEANING



OUR CLEANING PRODUCTS

CLEANING AND SURFACE PREPARATION

Quality, reliability and expertise applied to surface preparation prior to PVD/CVD coating.

COMPATIBILITY

- HSS
- PM HSS (High and low alloyed)
- HSSE
- Tool steel (High and low alloyed)
- Stainless steel
- Cold-work steel
- Nitriding steel
- Tungsten carbide
- Cermet
- Ceramic

PARTS

- Drill
- Reamers
- Inserts
- Taps
- Dies
- Bevels
- Grinders
- Hobs
- Saws

POLLUTIONS

- Grinding oils
- Oxidations
- Abrasives

DETERGENTS, SOLVENT, FINISHING AND SPECIFIC APPLICATIONS

PRODUCT	pH	TYPE	FUNCTION	APPLICATION/CONTAMINATION
VACUKLEEN 440 ¹	13.7	Detergent	Spray or ultrasonic cleaning	Grinding oil, polishing compounds
VACUKLEEN SUPRA II ²	14		Ultrasonic cleaning	
VACUKLEEN 20.01	8.4			
RODASTEL 30	0.5	Finishing detergent		Etching
GALVEX 18.08	9.5			Hydrophobic finish
KORROSTOP 5000	12.3	Rinse additive	Spray or ultrasonic cleaning	Protection against corrosion

¹ Requires an oil separator ² Can be used in vacuum system

SUPPORT

- **NGL Academy:** training on precision cleaning, passivation, water treatment, and HSE regulation
- **Application Centre:** various cleaning systems and wide range of analytical tools for all types of tests
- **Worldwide and local implementation**

ISO CERTIFICATION*

- ISO 9001 - Quality
- ISO 14001 - Environment
- ISO 45001 - Health and safety at work

*Applicable to the production site at NGL Cleaning Technology SA

STRONG ALKALIS

for heavy pollutions

▪ VACUKLEEN 440

Non foaming liquid detergent, suitable for removing neat and grinding oils in ultrasonic or spray processes (the machine must be equipped with an oil separator), but also abrasives or various organic compounds.

▪ VACUKLEEN SUPRA II

Phosphate free liquid detergent, suitable for removing neat, grinding oils and abrasives in ultrasonic processes.



MILD ALKALIS

for mild pollution and free rinsing

▪ VACUKLEEN 20.01

Universal liquid detergent, for degreasing on all materials. Gives a high degree of finish with its excellent rinsability.



FINISHING

for corrosion protection or etching

▪ GALVEX 18.08


Slightly alkaline finish for ultrasonic processes, which leaves a **water-repellent film**. Increases the speed of the drying process and protects against corrosion.

▪ KORROSTOP 5000

Rinsing additive in final rinse steps for an **optimal protection against corrosion** of sensitive steels. Suitable for spray cleaners.

▪ RODASTEL 30

Multipurpose acid finish: **slight etching and brightening** of metals and carbides to improve adherence of PVD/CVD coatings.

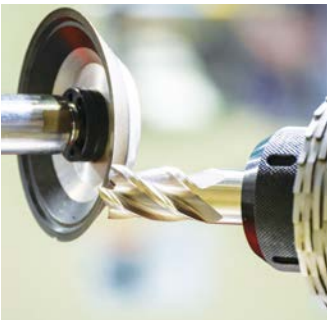

EQUIPMENT

With our **UPC 3000**, ensure on a daily basis that your equipment is properly set up:

- Measurement of ultrasonic power in watt/liter
- Measurement of the conductivity
- Temperature measurement
- Detergent concentration measurement
- Measuring the quality of demineralised water (0.001 µS/cm to 200 µS/cm)






CUTTING TOOLS RANGE: DECOATING

DECOATING STEEL TOOLS


Removal of PVD/CVD coatings while preventing corrosion.

MATERIALS:

- HSS
- PM HSS (low and high alloyed)
- HSSE
- HSS-Co
- Tool steel (low and high alloyed)
- Stainless steel
- Cold-work steel
- Nitriding steel
- Tempered steel

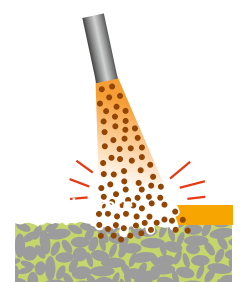

Sandblasting:
Damaged surface
Dulled edges

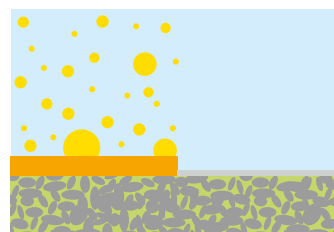


Chemical decoating:
No damage
to edges and surface

DECOATING CARBIDE TOOLS

Removal of PVD/CVD coatings while preventing cobalt leaching.

MATERIALS: CARBIDE + CERAMIC

- Tungsten carbide
- Cermet
- Zirconium oxide ceramic
- Aluminium oxide ceramic
- Soldered carbides tips steel tools
- cBN
- PCD
- MCD
- Al₂O₃

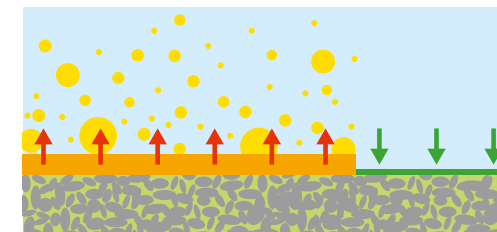

Stripping of coating
Cobalt leaching inhibition

STEEL DECOATING



▪ FERRODEC 56

Powdered product for the decoating of aluminium or titanium based layers on steel tools.

Benefits:

- Cost-effective
- Fast decoating
- Efficient decoating on Ti and Al based PVD/CVD coatings


▪ EXCARBONITE 222

Powdered alkaline liquid product for the decoating of chromium or silicon based layers on steel tools.



Benefits:

- Very efficient on Cr and Si layers
- Suitable for all types of Steel
- Efficient decoating on DLC(Cr) or DLC(Si) layers

TYPICAL DECOATING PROCESS FOR HSS TOOLS:

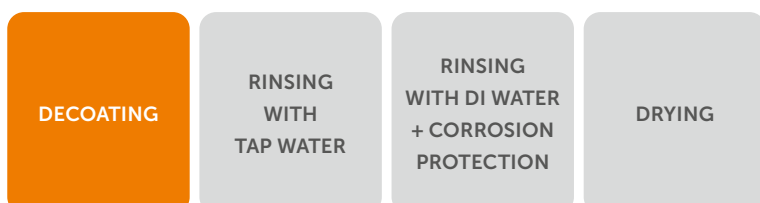

CARBIDE DECOATING

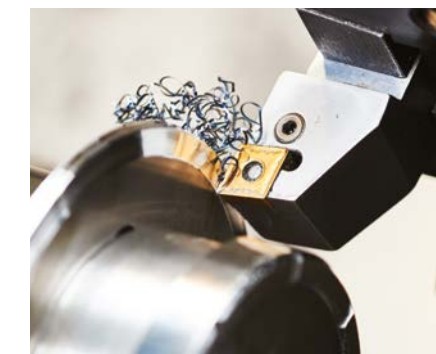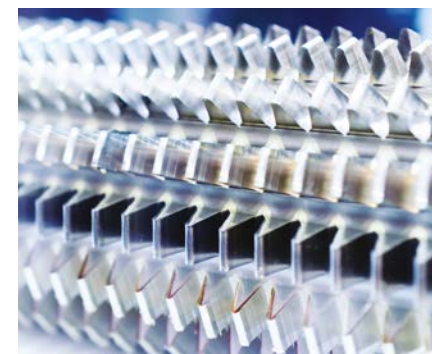

▪ UNICERAL 308

Acidic liquid product for the decoating of titanium, aluminium or zirconium PVD layers on carbide tools.

Benefits:

- Ready to use
- Optimized protection of carbide substrates
- Shiny effect after stripping process
- No damage to tools edges

▪ CERALTIN 211

Alkaline Liquid product for the decoating of chromium or silicon based layers on carbides.

Benefits:

- Optimized protection of Carbide substrates
- No crystallization of the bath and no vapor condensate
- Shiny Effect

TYPICAL DECOATING PROCESS FOR CARBIDE TOOLS:





NGL DECOATING MATRIX COATING / SUBSTRATE / COATING THICKNESS / TIME:

	COATINGS							
SUBSTRATES	TiCN	TiN, TiAlN, AlTiN	TiSiN, TiSiAlN	ZrN, ZrCN	AlCrN, AlCrSiN	DLC: Cr, CrN adhesion layer	DLC ta-C/DLC a-C/ DLC a-C:H	CrN
CARBIDE	U308	U308	U308	U308	C211	x	x	x
Time	1-2μ 18-24h / 2-3μ 48-72h / 3-5μ 3-6d	1-2μ 8-24h / 2-3μ 24-48h / 3-5μ 24-72h	1-2μ 8-24h / 2-3μ 24-48h / 3-5μ 24-72h	1-10h	1-2μ 24-72h / 2-3μ 48h-5d / 3-5μ 3-10d	-	-	-
HSS (with cobalt in the alloy)	U308	U308	U308	U308	E222, possible cobalt leaching	E222, possible cobalt leaching	y	E222, possible cobalt leaching
Time	1-2μ 18-24h / 2-3μ 48-72h / 3-5μ 3-6d	1-2μ 8-24h / 2-3μ 24-48h / 3-5μ 24-72h	1-2μ 8-24h / 2-3μ 24-48h / 3-5μ 24-72h	1-10h	45-180 min	45 min-48h	-	20-120 min
HSS	F56	F56	F56	U308	E222	E222	y	E222
Time	3-6h	1-3h	1-3h	1-10h	20-120 min	45 min-48h	-	20-120 min
HSS (without cobalt in the alloy)	F56	F56	F56	U308	E222	E222	y	E222
Time	3-6h	1-3h	1-3h	1-10h	20-120 min	45 min-48h	-	20-120 min
TOOL STEEL	F56	F56	F56	U308	E222	E222	y	E222
Time	3-6h	1-3h	1-3h	1-10h	20-120 min	45 min-48h	-	20-120 min
STAINLESS STEEL	F56	F56	F56	U308	E222	E222	y	E222
Time	3-6h	1-3h	1-3h	1-10h	20-120 min	45 min-48h	-	20-120 min
NICKEL-CHROMIUM-BASED SUBSTRATES	F56	F56	F56	U308	E222	E222	y	E222
Time	3-6h	1-3h	1-3h	1-10h	20-120 min	45 min-48h	-	20-120 min

x - no solution
y - no solution if no Cr/CrN adhesion layer available

The decoating matrix is a schematic abstract. Due to the high substrate/coating diversity the classification for compatibilities can't be generalized and must be confirmed by test before use.

Decoating bath temperatures:

- U308: Uniceral 308 (80-90°C (68-86°F) / bath circulation required
- F56: Ferrotec 56 (60-80°C (140-176°F) / usually 70°C (158°F)
- E222: Excabonite 222 (40-70°C (104-158°F) / usually 55°C (131°F) / bath circulation required
- C211: Ceraltin 211 (130-140°C (266-284°F)



WHY DECOAT PARTS?



SAFETY

TOOL RESHARPENING OR REPOLISHING: GIVING THE TOOL MULTIPLE LIFE CYCLES

PVD and CVD coatings allow to increase the hardness of a cutting tools edge, hence increasing both the lifetime and output of the tool. But the coating may wear and the tool will need to be resharpened and repolished.





For parts such as hobs or injection molds, where the tolerance on the produced parts is strictly controlled, it is essential that the coating is removed without any damage to the substrate.

COATING DEFAULT:

PVD coating is very sensitive and many issues can occur in the surface preparation process prior to coating, as well as problems during the coating itself, such as arcs formation or adhesion issues.

An insert or a drill which has coating defects or does not match the necessary coating thickness will be useless and in order to avoid scrapping these costly tools, decoating is the only professional option.

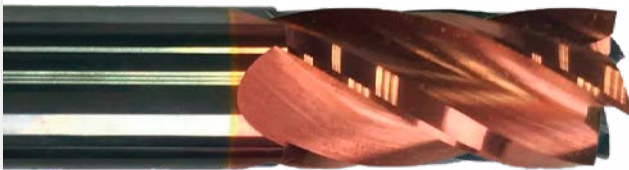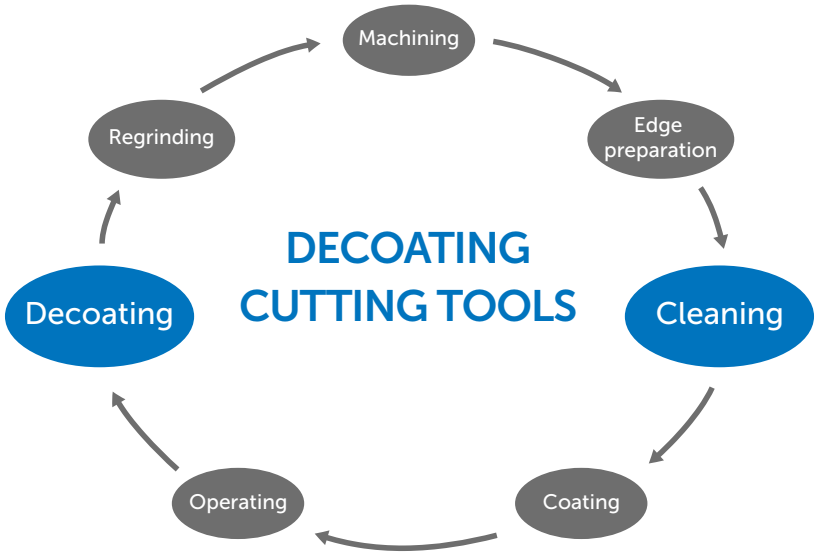

Before Decoating




After Decoating

The NGL decoating range allows precise and safe decoating of most coatings on both HSS or carbide tools.

NGL chemicals are designed to mitigate risks to the maximum, by looking for the best compromise between efficiency and safety in the composition of the products.

Unsafe decoating		Safe decoating	
EDTA		Uniceral 308	Non hazardous
Hydrochloric acid		Excarbonite 222	
Hydrofluoric acid		Ceraltin 211	
Hydrogen Peroxide		Ferrodec 56	Non hazardous
Sodium perborate			
Potassium permanganate			

UNICERAL 308 AND CERALTIN 211: EXTRA SAFETY

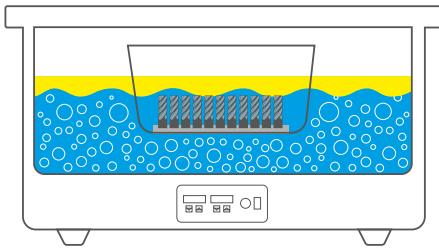

Oily top phase reduces hazardous fumes and strong evaporation

TRAINING

Benefit from our support to qualify your operators:

- Use
- Storage
- Handling
- Disposal



- Smart design
- Smart usage



Improved Safety
+
Risk management





THE DECOATING CENTRE IN BOCHOLT, GERMANY

Our decoating processes are suited for PVD, CVD and PACVD deposited layers.



NGL develops and provides decoating solutions and services for small drill bits, to large pieces such as molds, parts sizes up to 1.5m in diameter and weighing up to 5t.

Our expertise extends to intricate and long parts, with blind holes and deep cavities.

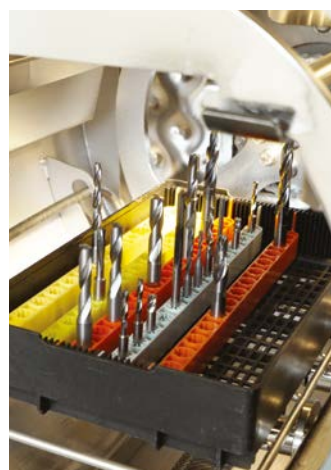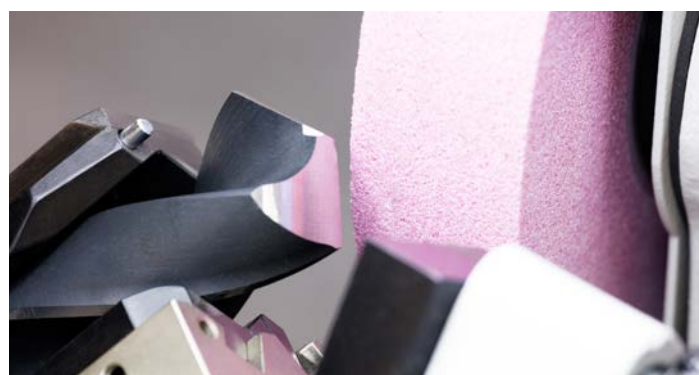

PARTS TO BE DECOATED :

- Cutting tools
- Molds/dies
- PVD chamber parts
- PVD planetary and tube holders
- CVD graphite and CFC parts
- Ceramic components
- Decorative parts
- Special tools
- Recycling materials (carbide scrap)



TANK CAPACITIES:

- 3 tanks: 20x30x20 cm
- 3 tanks: 50x60x45 cm
- 3 tanks: 140x25x50 cm
- 3 tanks: 145x145x50 cm
- 3 tanks: 280x80x70 cm
- 6 tanks: 45x60x45 cm
- 6 tanks: 145x70x70 cm

Over 15 different decoating processes in more than 50 different tanks available.



WEIGHT CAPABILITIES : Up To 5t

THE APPLICATION CENTRE, A NETWORK OF EXPERTISE

Ask our experts to help you define the right process from scratch or improve an existing one with our products.

NGL laboratories are open to perform lab tests in industrial cleaning systems with your parts.

CLEANING EQUIPMENTS:

- A Riebesam spray machine, with over and under nozzles, 4 dosing units, and 0,6 bar pressure jets.
- A Novatec Pluritank ultrasonic line with dual frequencies (25 and 40 kHz), 4 cleaning stages, 4 rinsing stages (Tap and DI water), and a lift-out unit.
- For high purity cleaning and sensitive parts, additional frequencies of 80 and 130 kHz are available.
- A Novatec CRD monochamber machine for partial vacuum ultrasonic cleaning coupled with spray cleaning cycles. Particularly suited for complex geometries.

CLEANING CONTROL EQUIPMENTS:


- Kruss DSA 100 E => surface tension and polarity measurer
- Keyence VHX 5000 => extreme magnification
- MEB JEOL 5600LV x Oxford EDX => surface and pollution characterisation
- Leica systems particles counting
- Binocular microscopes, dyne pens, etc...



APPLICATION CENTRES IN THE WORLD:



- Switzerland (Headquarter)
- Denmark
- Germany
- France
- United States
- China
- Singapore

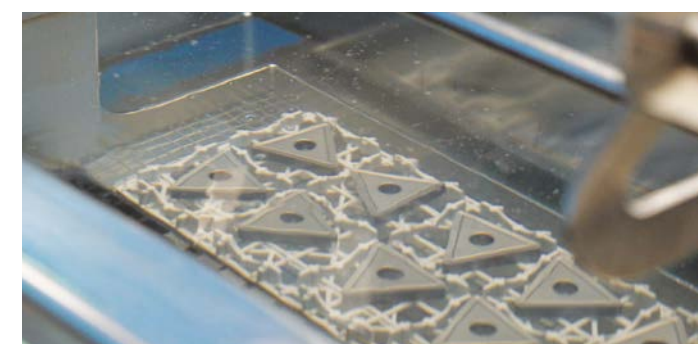

HEADQUARTER AND OUR SUBSIDIARIES AROUND THE WORLD

NGL CLEANING TECHNOLOGY SA (Headquarter)

Chemin de la Vuarpillière 7
CH-1260 NYON
contact@ngl-group.com

NGL FRANCE SAS

Parc Aktiland Bât B
1 rue de Lombardie
FR-69800 SAINT-PRIEST
france@ngl-group.com

NGL NORDIC A/S

Industriskellet 10
DK-2635 ISHØJ
nordic@ngl-group.com

NGL AMERICA INC.

747 North Church Road, Suite G-9
ELMHURST, IL 60126, USA
usa@ngl-group.com

NGL SHANGHAI

Room 407, Building 3, No.3199 Jinhai Road
Fengxian District
CN-201406 SHANGHAI
shanghai@ngl-group.com

NGL ASIA PACIFIC PTE LTD

28 Kallang Place #05-09
Kallang Basin Industrial Estate
SG-339158 SINGAPOUR
asiapacific@ngl-group.com



16/01/2023



NGL CLEANING GmbH - CHEMICAL & DECOATING TECHNOLOGY

Schlavenhorst 15 - DE-46395 BOCHOLT - GERMANY
+49 2871 27 411-40 - kontakt@ngl-group.com - www.ngl-group.com



MADE IN
GERMANY

