



# DECOFLOC 110

Coagulation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.



## INDUSTRIAL WASTEWATER TREATMENT RANGE

### PRODUCT TYPE

Coagulation agent (aluminum-based compound) in aqueous solution.

### ASPECT

- Colourless liquid
- Water solubility: 100%

### PHYSICOCHEMICAL DATA


- pH: 2.5
- Density: 1.274g/cm<sup>3</sup>

### BENEFITS

- Conformity of wastewater with legal requirements on heavy metals concentrations
- Does not contain chlorides
- Improves the clearness of treated water
- Efficient in decreasing the pH of alkaline discharges

30/03/21

### OPERATING PRINCIPLE:

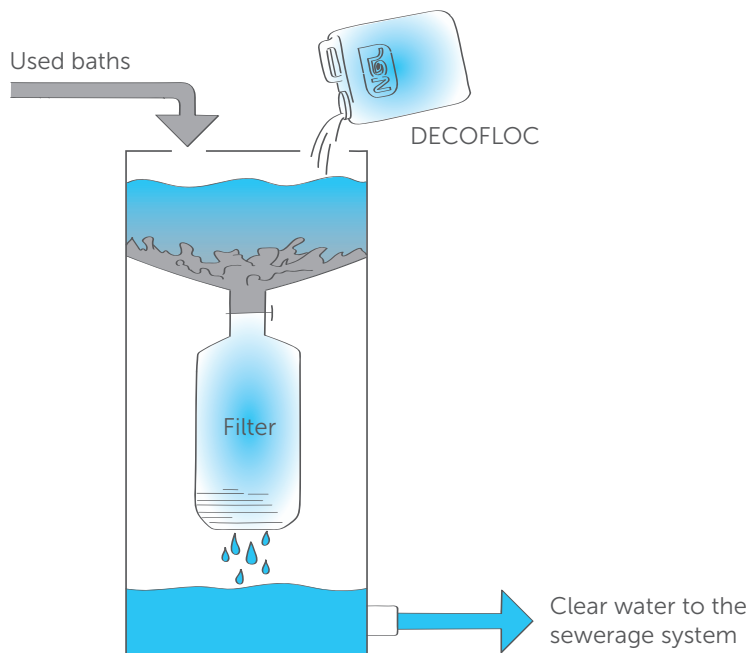


### INSTRUCTIONS FOR USE

- Dosage: 1-5l/m<sup>3</sup>

### STORAGE CONDITIONS

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 5l, 10l, 25l, barrel of 200l and container of 1000l.

### PROCESS EXAMPLE:

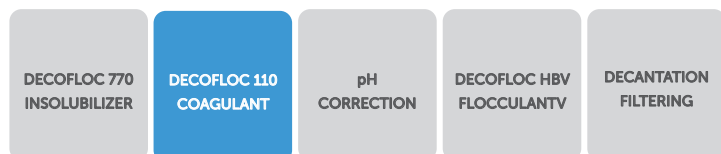

If you have any questions, please contact our NGL Water Technology on: +41 22 365 46 66

