



CEROWEG EXTRA

Strong alkaline liquid detergent used in ultrasonic cleaning for the removal of abrasives.



OPHTHALMIC OPTICS RANGE

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning	Abrasives

COMPATIBILITY

- Mineral glass*
- Organic glass

*Please contact NGL before implementing a process.

COMPONENTS

- Strong alkalis, surfactants, phosphates
- Product without chelating agents
- No CMR compounds, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 14
- Density: 1.30
- Surface tension: 41.8 mN/m



INSTRUCTIONS FOR USE*

- Concentration: 2 to 5%
- Temperature: 50 to 65°C (122°F to 149°F)
- Time: 2 to 5 minutes

*Dependent on the quality of water and the nature and quantity of contaminants.

PROCESS EXAMPLE

- Removal of abrasives

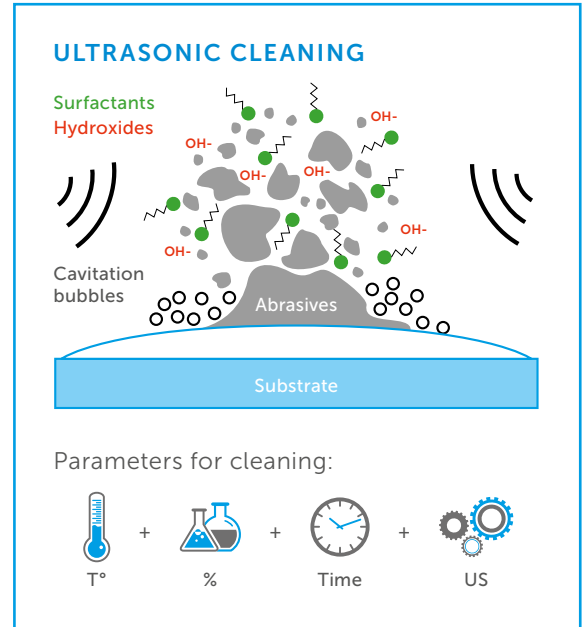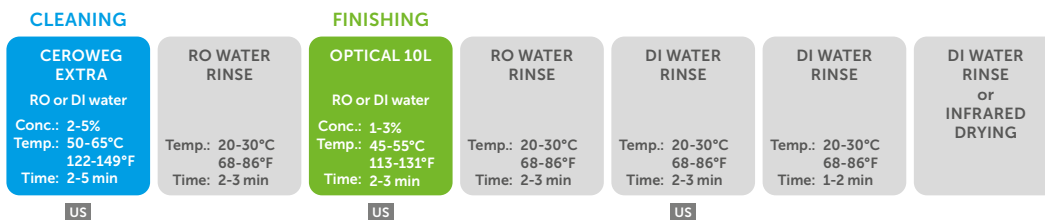

29/03/23

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

