



ALLSTRIP

Universal solvent with a high flash point for the removal of blocking glues and lacquers in an ultrasonic process or in beakers.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning	Removal of blocking glues and lacquers

COMPATIBILITY

- Stainless and tempered steel
- Aluminium
- Gold: white, pink, yellow
- Rhodium, palladium
- Copper alloys:
 - Brass
 - CuBe
 - Nickel silver

COMPONENTS

- EACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: n.m.
- Density: 0.99
- Flash point: 88°C (190°F)

INSTRUCTIONS FOR USE*

- Concentration: 100%
- Temperature: 20 to 50°C (68 to 122°F) (not exceed 70°C (158°F))
- Time: 2 to 10 minutes


*Use in a space that is naturally ventilated or equipped with a fume extraction system.

PROCESS EXAMPLES

- Removal of glues, waxes, lacquers, setters cement, in beakers



- Removal of contaminants in an ultrasonic process

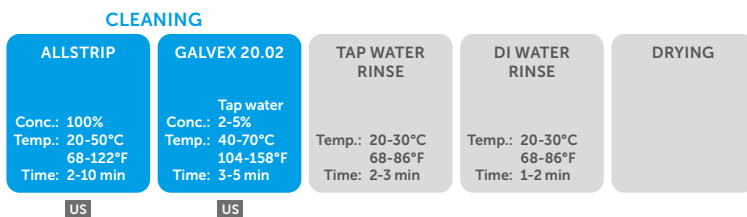

ULTRASONIC CLEANING

Watch hands / glasses
blocking glue/
lacquer

Lapping plate

Glue dissolution

Clean parts and
substrates

Parameters for cleaning:

T° + % + Time + US

30/08/23

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

SWISS
QUALITY

