

# **DECOCLEAN 500**

Liquid detergent for the removal of oils from precious metal chips in centrifugal cleaners.



## JEWELLERY RANGE

FUNCTION	APPLICATION/POLLUTION
Centrifugal	Oils

#### COMPATIBILITY

- Silver: 800 925 (sterling)
- Gold: white, pink, yellow

#### COMPONENTS

- Surfactants, sequestering agents
- No CMR compound, VOC, REACH compliant


#### PHYSICOCHEMICAL DATA

- pH concentrated: 13
- Density: 1.03
- Surface tension: 30 mN/m

### **INSTRUCTIONS FOR USE\***

Decoclean 500 has good performance at a concentration of 2% in tap water. For highly polluted parts, concentration can be increased to 8%.

- Concentration: 2 to 8%
- Temperature: 20 to 60°C (68 to 140°F)
- Time: 3 to 30 minutes \*
- \* Depending cycle time of the equipment

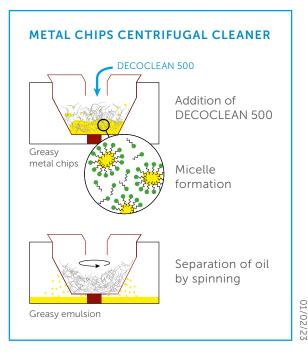

#### **STORAGE CONDITIONS**

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND +41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com



