



DECOSPRAY™

Slight alkali, for the removal of neat oil in ultrasonic or spray processes. Requires an oil separator.



MEDICAL RANGE

FUNCTION	APPLICATION/POLLUTION
Spray cleaning. Oil removal in ultrasonic process with oil separator.	Neat oils

COMPATIBILITY

- Stainless steel:
 - Austenitic
 - Martensitic
 - Precipitation hardening
 - Ceramics
 - Titanium
 - Chromium – Cobalt
 - Aluminium
 - Polymer*
- *Check compatibility with NGL.

COMPONENTS

- Surfactants, chelating agents
- No CMR compounds, REACH compliant

PHYSICO-CHEMICAL DATA

- pH concentrated: 9.6
- Density: 1.12
- Surface tension: 39.7 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 2 to 5%
- Temperature: 40 to 70°C (104°F to 158°F)
- Time: 3 to 5 minutes

*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLES

- Interoperation cleaning


CLEANING

DECOSPRAY™ Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min Spray cleaning	DECOSPRAY™ Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min Spray cleaning	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 2 min Spray cleaning	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 2 min Spray cleaning	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 2 min Spray cleaning	HOT AIR DRYING
---	---	--	--	---	-----------------------

- Finishing cleaning

CLEANING

DECOSPRAY™ Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min US	RODACLEAN 2018 Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min US	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 2 min	FINISHING GALVEX 20.01 Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min US	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 2 min	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 2 min	HOT AIR DRYING
---	---	--	---	--	---	-----------------------

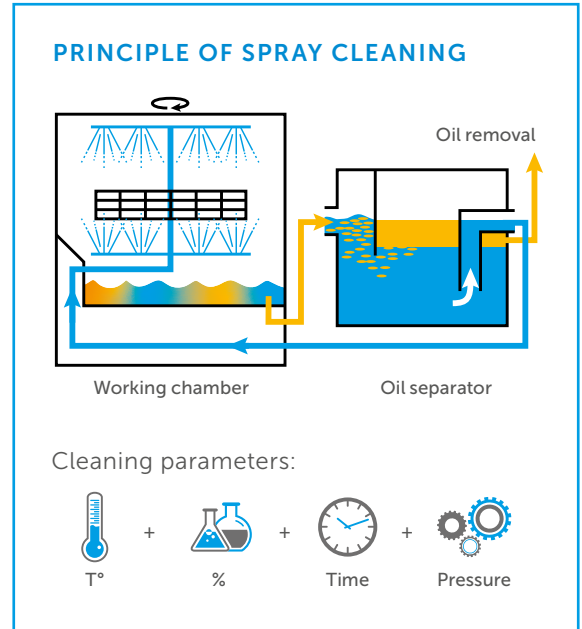

18/01/23

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (PEHD).

PRODUCT COMPATIBLE WITH VALIDATION STANDARDS

- Cleaning:
 - ISO 19227 - 2018
 - ASTM F3127 - 16
- Characterization of inorganics:
 - ISO 10993 - 18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

SWISS QUALITY

