



# GALVEX 20.02

Universal detergent for the removal of polishing pastes, soluble oil and light pollutions in ultrasonic process.



## LUXURY ACCESSORIES RANGE

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning, interoperation, surface preparation	Soluble oils, polishing pastes, tumbling residues, etc.

### COMPATIBILITY

- Stainless steel
- Brass (leaded and unleaded)
- Rhodium, palladium
- Gold: white, pink, yellow
- ABS
- Aluminium
- Nickel silver

### COMPONENTS

- Surfactants, solubilising agent
- No NTA, phosphates, DEA
- No CMR compound, REACH compliant

### PHYSICOCHEMICAL DATA

- pH concentrated: 10
- Density: 1.03
- Surface tension: 27.6 mN/m

### INSTRUCTIONS FOR USE\*

- Concentration: 2 to 5%
- Temperature: 40 to 70°C
- Time: 3 to 5 minutes

\*Dependent on the quality of the water and the nature and quantity of contaminants.

### PROCESS EXAMPLES


- Cleaning after polishing

#### CLEANING



- Final cleaning and brightening

#### CLEANING

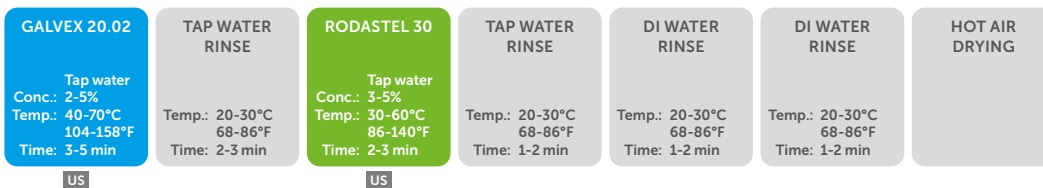

### ULTRASONIC CLEANING

Surfactants

Cavitation bubbles

Polishing paste

Substrate

Parameters for cleaning:

T° + % + Time + US

Clean and bright surface.  
Cleaned blind holes.

22/11/22

### STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

