

HELIT

Neutral universal detergent, with hydrophilic effect for superfinish of surfaces in ultrasonic process prior drying.




JEWELLERY RANGE

FUNCTION	APPLICATION/POLLUTION
Hydrophilic superfinish	Light pollutions

COMPATIBILITY

- Stainless steel
- Lead-free brass
- Silver: 800 - 925 (sterling)
- Gold: white, pink, yellow
- Platinum
- Acetate

- Rhodium, palladium
- Stones*:
 - Diamond, sapphire, ruby, emerald
 - Zirconium, ceramic
- *Please contact NGL before implementing a process.

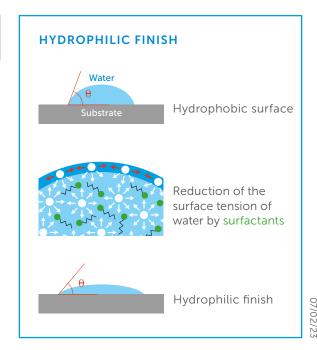

0.00

COMPONENTS

- Surfactants
- No phosphates, no NTA

PHYSICOCHEMICAL DATA

■ pH concentrated: 6.9

■ Density: 1.04

Surface tension: 27.9 mN/m

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).

INSTRUCTIONS FOR USE*

Concentration: 3 to 5%Temperature: 40 to 70°CTime: 2 to 4 minutes

PROCESS EXAMPLE

• Finishing cleaning

CLEANING	
GALVEX 20.02	
Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	
US	

TAP WATER RINSE

Temp.: 20-30°C 69-86°F Time: 3-5 min

FINISHING HELIT

Tap water
Conc.: 3-5%
Temp.: 40-70°C
104-158°F
Time: 2-4 min
US

TAP WATER RINSE

Temp.: 20-30°C Tem 69-86°F Time: 3-5 min Tim

DI WATER RINSE

Temp.: 20-30°C 69-86°F Time: 3-5 min DI WATER RINSE

Temp.: 20-30°C 69-86°F Time: 3-5 min HOT AIR DRYING

Application Centre

If you have any questions, please contact our Application Centre on: +41 22 365 46 66





^{*}Dependent on the quality of the water and the nature and quantity of contaminants.