



DECOCLEAN 540

Strong alkaline liquid for the removal of neat oil and polishing compounds in spray or ultrasonic processes. Requires an oil separator.



PRECISION MECHANICS RANGE

FUNCTION	APPLICATION/POLLUTION
Oil removal in spray or ultrasonic processes with an oil separator	Neat oils, polishing compounds

COMPATIBILITY

- Super alloys :
 - Inconel, Waspalloy, A286
- Hard steels :
 - 52100 Chrome steel, cast iron
 - 15-5 PH, 17-4 PH
- Bearing steels :
 - D50, 440C, 316
- Ceramics
- Polymers
 - Nylon, PA, PEEK

COMPONENTS

- Surfactants, chelating agents
- No CMR compounds, REACH compliant
- No phosphates

PHYSICOCHEMICAL DATA

- pH concentrated: 13.9
- Density: 1.27
- Surface tension: 39.7 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 3 to 10%
- Temperature: 40 to 70°C (104°F to 158°F)
- Time: 3 to 5 minutes

*Dependent on the quality of water and the nature and quantity of contaminants.

PROCESS EXAMPLES

- Removal of neat oil in spray process

CLEANING

Oil separator


DECOCLEAN 540 Tap water Conc.: 3-10% Temp.: 40-70°C 104-158°F Time: 3-5 min Spray cleaning	DECOCLEAN 540 Tap water Conc.: 3-10% Temp.: 40-70°C 104-158°F Time: 3-5 min Spray cleaning	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 2-3 min Spray cleaning	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min Spray cleaning	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min Spray cleaning	HOT AIR DRYING
---------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------	-----------------------

- Removal of neat oil or polishing compounds in ultrasonic process

CLEANING

Oil separator

DECOCLEAN 540 Tap water Conc.: 1-5% Temp.: 40-70°C 122-158°F Time: 2-5 min US	RODACLEAN 2018 Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-5 min US	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 2-3 min	FINISHING RODASTEL 30 Tap water Conc.: 3-5% Temp.: 30-60°C 86-140°F Time: 2-3 min US	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min	HOT AIR DRYING
--------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------	---------------------------------------------------------------------	---------------------------------------------------------------------	-----------------------

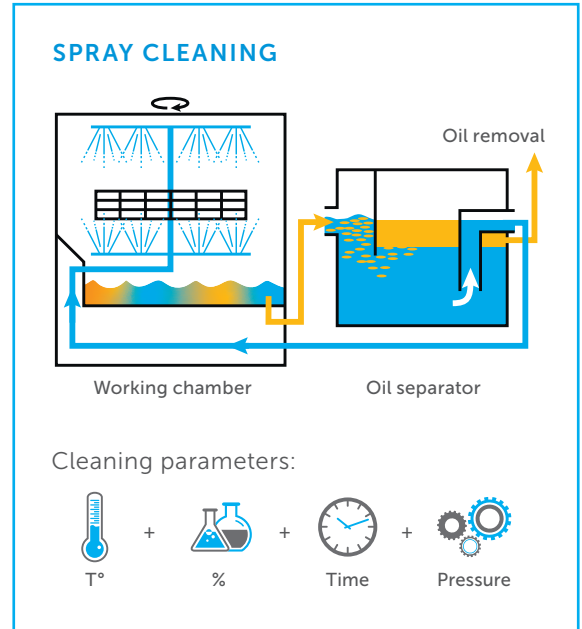

23/11/23

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - PRECISION CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

SWISS QUALITY

