



GALVEX 18.08

Light alkaline liquid detergent used for hydrophobic finishing in an ultrasonic process,



AEROSPACE & AUTOMOTIVE RANGE

FUNCTION	APPLICATION/POLLUTION
Finishing in ultrasonic process	Water-repellent, hydrophobic

COMPATIBILITY

- Aluminium 2024, 6061, 6082, 7075
- Titanium, TA6V
- Copper alloys:
 - Brass
 - Bronzes
- Ceramics
- Polymers
 - Nylon, PA, PEEK
- Super alloys :
 - Inconel, Waspalloy, A286
- Hard steels :
 - 52100 Chrome steel, cast iron
 - 15-5 PH, 17-4 PH
- Bearing steels :
 - D50, 440C, 316

COMPONENTS

- Surfactants, solubilising agent, chelating agents
- No CMR compound, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 9.5
- Density: 1.08
- Surface tension: 21.8 mN/m



INSTRUCTIONS FOR USE*

- Concentration: 1 to 3%
- Temperature: 40 to 60°C (104 to 140°F)
- Time: 3 to 5 minutes

*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLE

- Removal of polishing compounds in ultrasonic process

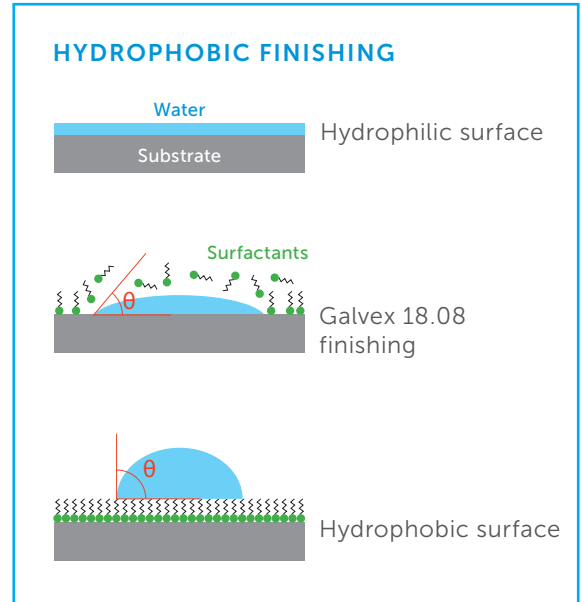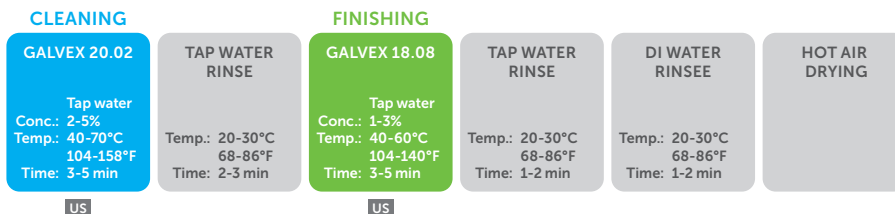

21/11/23

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

