



RODASTEL 30

Liquid acidic product used for deoxidation, neutralization, and activation of surfaces prior to vacuum or electrolytic plating in ultrasonic processes.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Deoxidation, activation and brightening	Oxydes

COMPATIBILITY

- Stainless steel
- Aluminium
- Gold: white, pink, yellow
- Rhodium, palladium
- Copper alloys:
 - Brass
 - CuBe
 - Nickel silver

COMPONENTS

- Surfactants, organic acid
- No CMR compounds, VOC, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 0.5
- Density: 1.22
- Surface tension: 31.5 mN/m



INSTRUCTIONS FOR USE*

- Concentration: 3 to 5%
- Temperature: 30 to 60°C (86 to 140 °F)
- Time: 2 to 3 minutes

*Dependent on the quality of water and the nature and quantity of contaminants.

PROCESS EXAMPLE

- Final cleaning and brightening

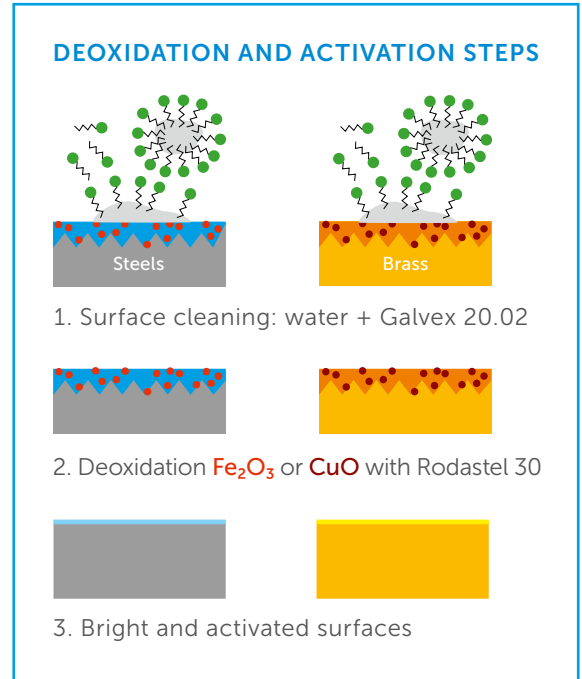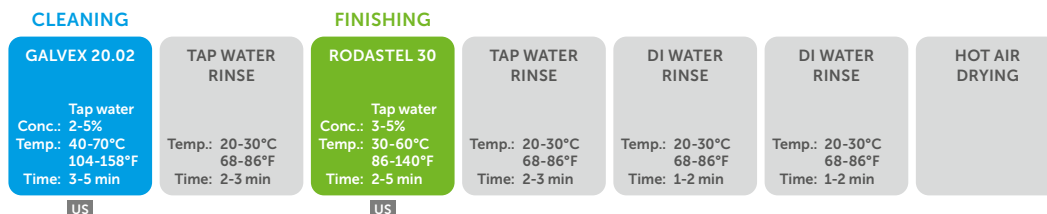

15/02/23

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

