



GALVEX 18.08

Slightly alkaline liquid product used for hydrophobic finishing in ultrasonic process, prior to drying.



LUXURY ACCESSORIES RANGE

FUNCTION	APPLICATION/POLLUTION
Water-repellent, hydrophobic	Water

COMPATIBILITY

- Stainless steel
- Brass (leaded and unleaded)
- Zamak
- Rhodium, palladium
- ABS
- Aluminium
- Nickel silver
- Gold: white, pink, yellow

COMPONENTS

- Surfactants, solubilising agent, chelating agents
- No CMR compound, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 9.5
- Density: 1.08
- Surface tension: 21.8 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 1 to 3%
- Temperature: 40 to 60°C (104 to 140°F)
- Time: 3 to 5 minutes

*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLE


- Hydrophobic finish

CLEANING

GALVEX 20.02 Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 3-5 min	FINISHING GALVEX 18.08 Tap water Conc.: 1-3% Temp.: 40-60°C 104-140°F Time: 3-5 min	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 1 min	DI WATER RINSEE Temp.: 20-30°C 68-86°F Time: 1 min	HOT AIR DRYING
---	--	---	--	--	-----------------------

US

US

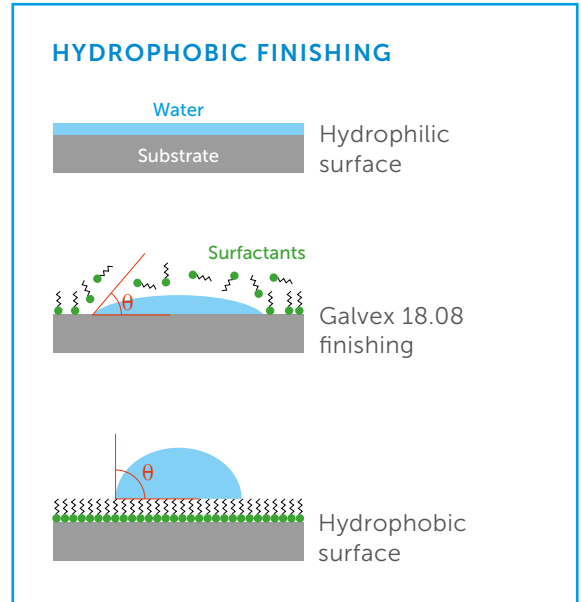

10/05/22

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

