



NANOCLEAN 2018

Light alkaline liquid used in ultrasonic processes for the removal of light pollutions, dust, and fingerprints. Also suitable for a hydrophilic finish.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Fine ultrasonic cleaning, separating and hydrophilic finish	Light pollutions, fingerprints, particles

COMPATIBILITY

- Glass :
 - Acrylic
 - Mineral
 - Sapphire

INGREDIENTS

- No phosphates
- No CMR compounds, REACH compliant

PHYSICAL AND CHEMICAL DATA

- pH concentrated: 9.5
- Density: 1.03
- Surface tension: 27.4 mN/m


INSTRUCTIONS FOR USE*

- Concentration: 1 to 5%
- Temperature: 40 to 60°C (104 to 140°F)
- Time: 3 to 5 minutes



*Dependent on the quality of water and the nature and quantity of contaminants.

PROCESS EXAMPLES

- Cleaning of sapphire glasses after surfacing

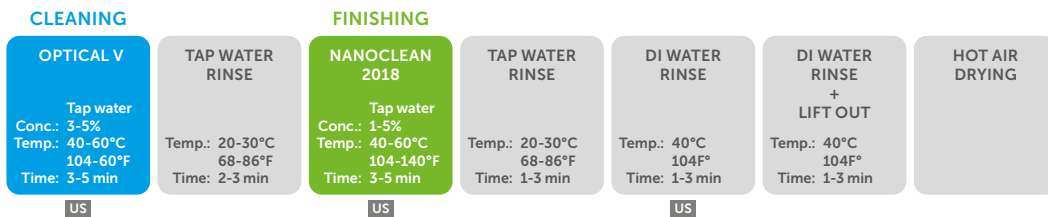

- Surface preparation

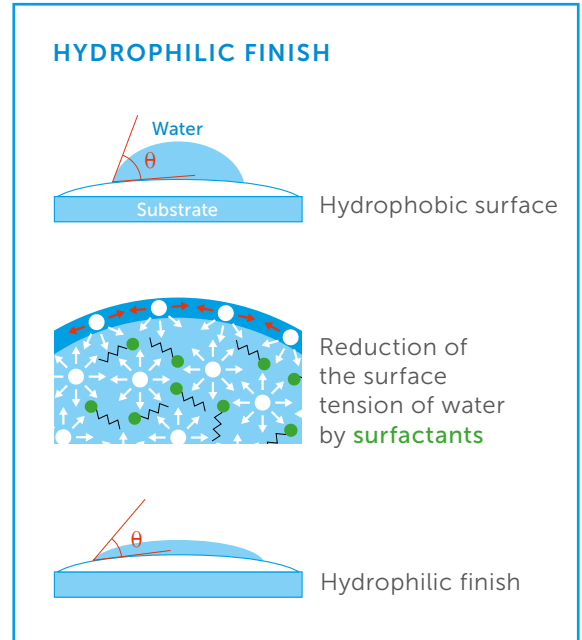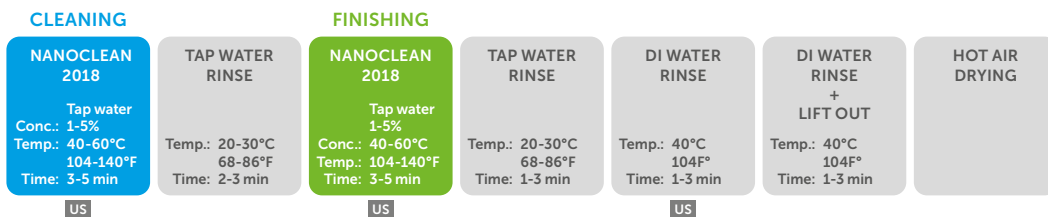

11/08/22

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (PEHD).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

